



RSL – Cypres – Cutaway cable routing


A customer found a miss routed cypres. The following pictures will show the proper way to route the RSL on a sport rig (student or expert), Sigma and M-Sigma.

Proper Instalation:



On the following pictures you can see how the AAD control unit cable goes behind the RSL lanyard, how the yellow cutaway cable goes through the Collins lanyard in the RSL Lanyard and how the Red Skyhook lanyard and the white reserve pin lanyard are larkshaded on the RSL Lanyard.

Improper Routing:

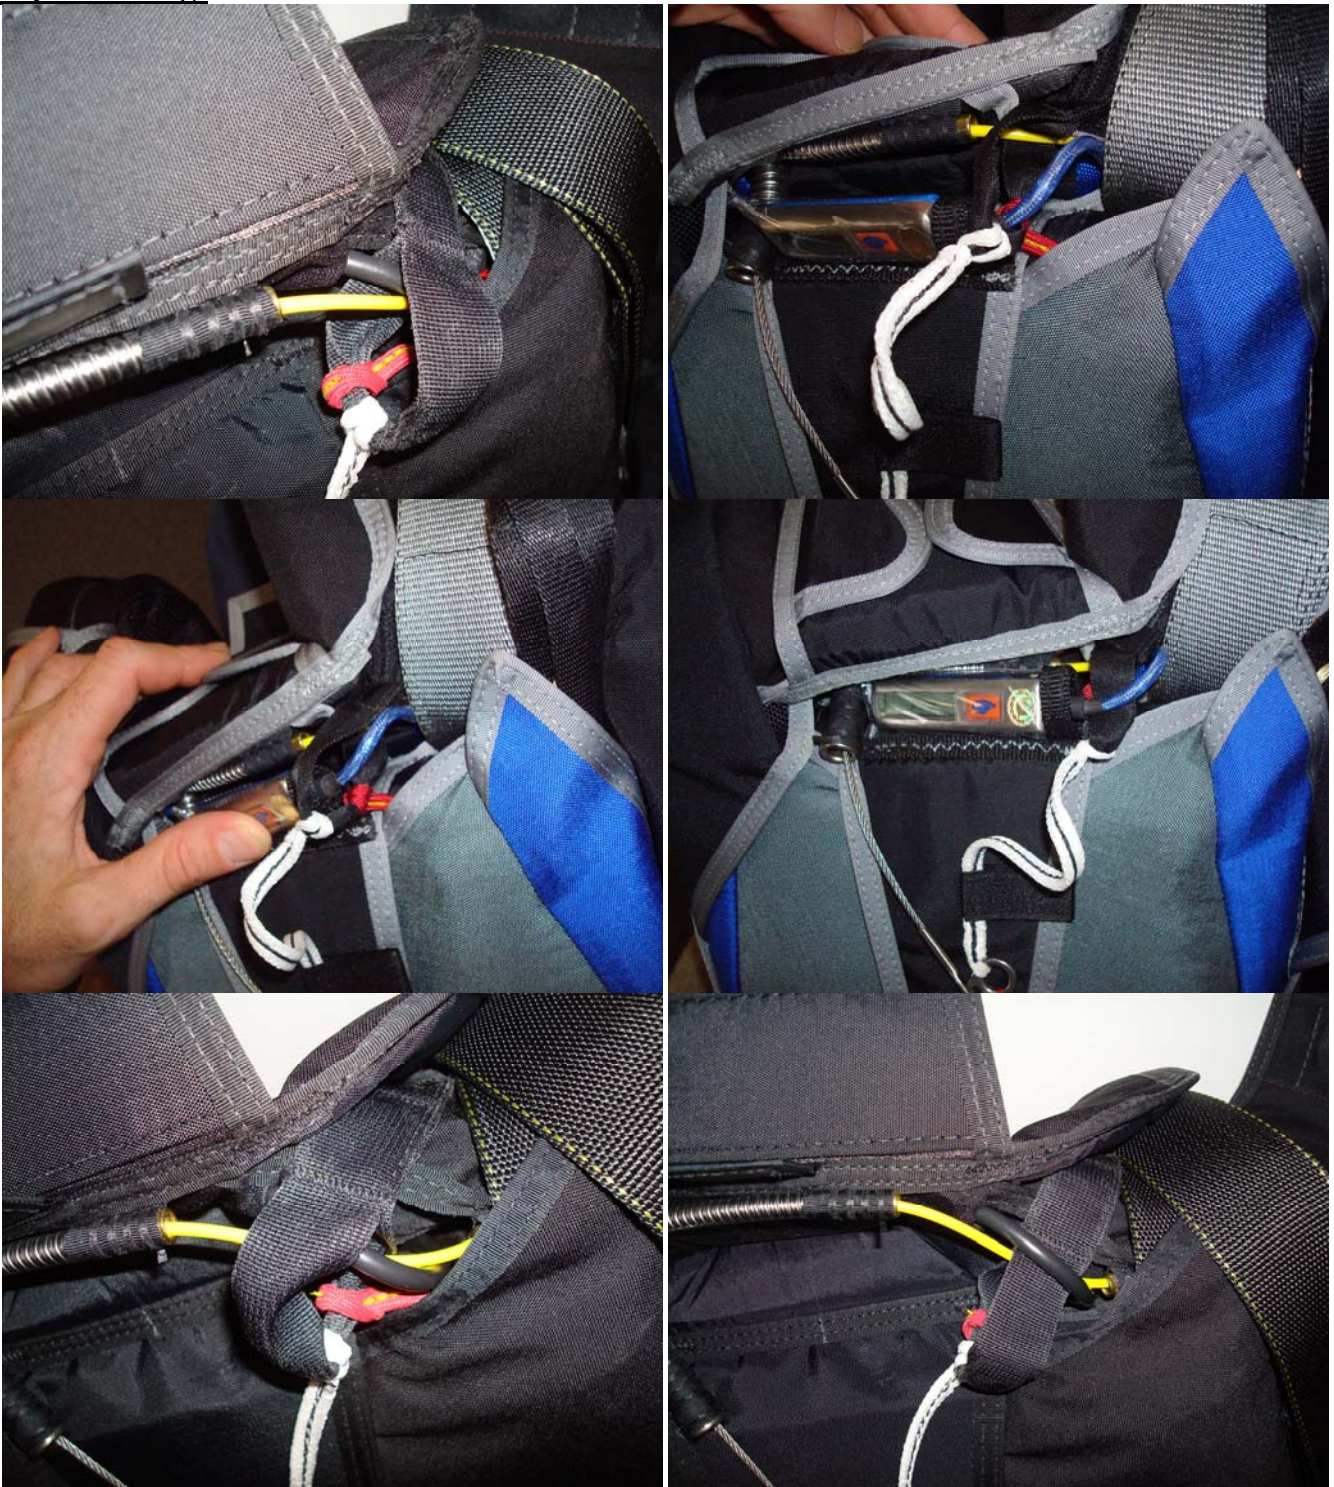



On the following pictures you can see how the AAD Control Unit is routed through the Collins Lanyard, Over the RSL Lanyard, and Inbetween the Red and White Lanyard. This could cause damage and/or entanglements with the reserve deployment to which it may result in serious injure or even death. Please check the routing of your RSL Lanyard (Skyhook and non-Skyhook)